



WASHER TOSS GAME

CONSTRUCTION:

1. CUT PLYWOOD INTO 2 EA 16" X 48" PIECES.
2. LAYOUT THE 5 1/2" DIA. HOLES ON BOTH PIECES AS SHOWN.
3. CUT THE HOLES ON OR INSIDE THE OUTLINES FOR BEST ACCURACY.

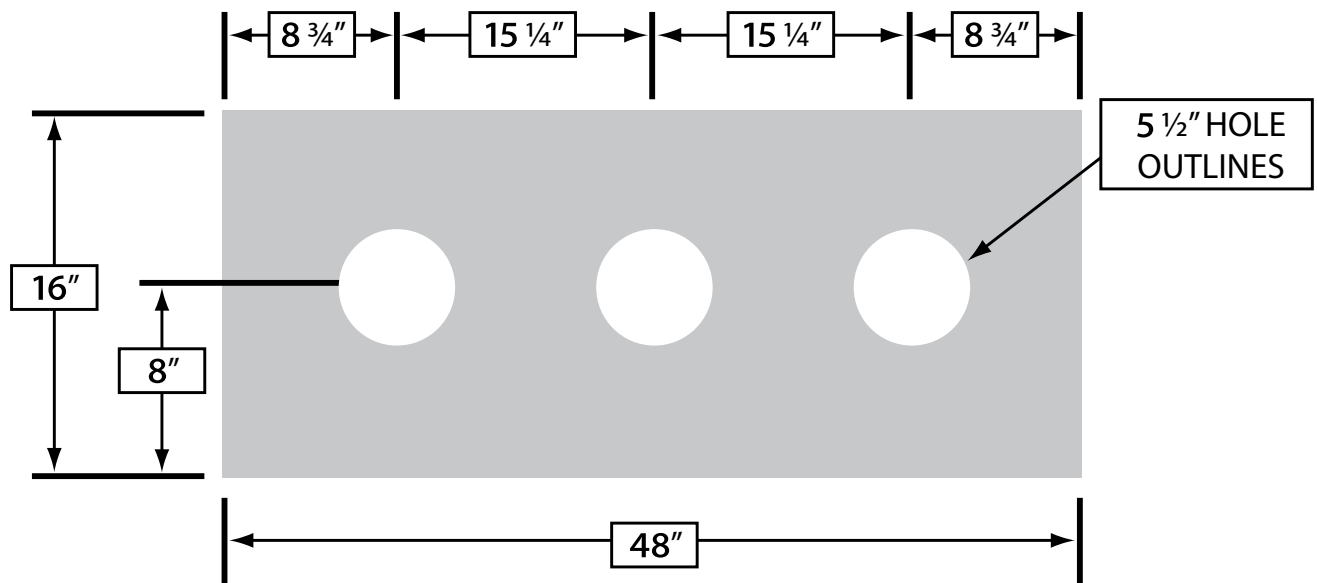

4. LAYOUT LEG CENTERLINES ON BOTH SIDES OF BOTH BOARDS AS SHOWN BELOW.

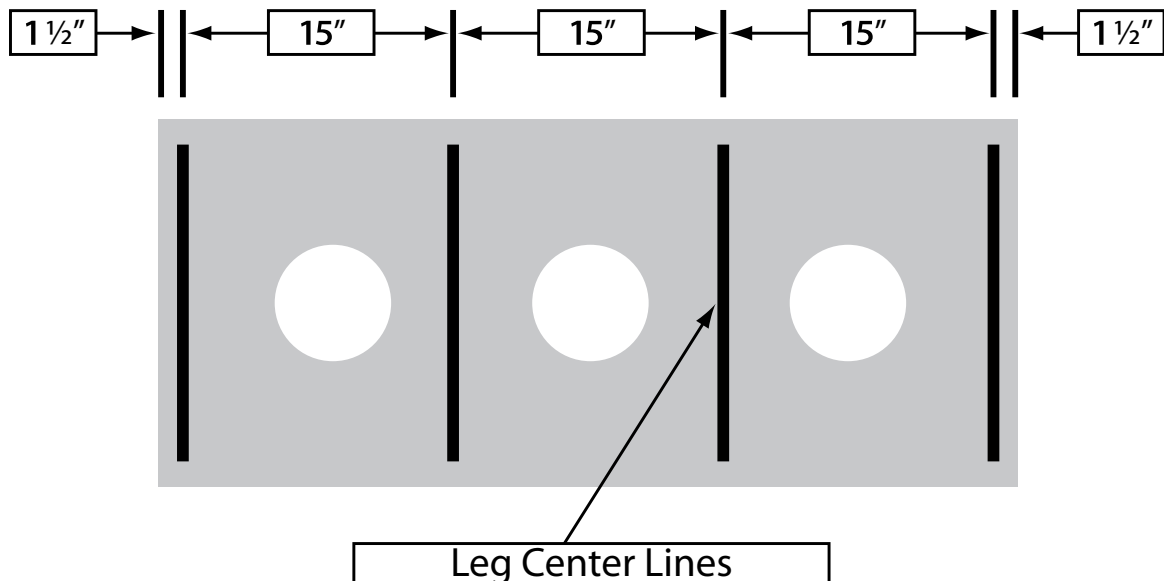


5. CUT OUT 8 LEGS:

- 2 LEGS 14" X 4"
- 2 LEGS 14" X 3 1/16"
- 2 LEGS 14" X 3 3/8"
- 2 LEGS 14" X 3 1/16"

NOTE: THE BOARD WILL SLANT ONE INCH FROM ONE END TO THE OTHER SO, THE LEGS ARE GRADUATED SIZES.


6. INSTALL LEGS ON LEG CENTERLINES. LEGS INSTALL ON ROUGH SIDE OF BOARD. (CARPET WILL LATER GO ON SMOOTH SIDE.) USE 5 SCREWS PER LEG. SHEETROCK SCREWS WILL NOT REQUIRE SCREW PILOT HOLES. CLAMP LEG ONTO LEG CENTERLINE. THE BOARD WILL OVERLAP THE LEG BY 1" EACH SIDE. POSITION LEGS BY SIZE AS SHOWN BELOW. DRIVE THE SCREWS THROUGH THE BOARD INTO THE LEGS UNTIL THE SCREWHEADS ARE FLUSH WITH BOARD SURFACE.

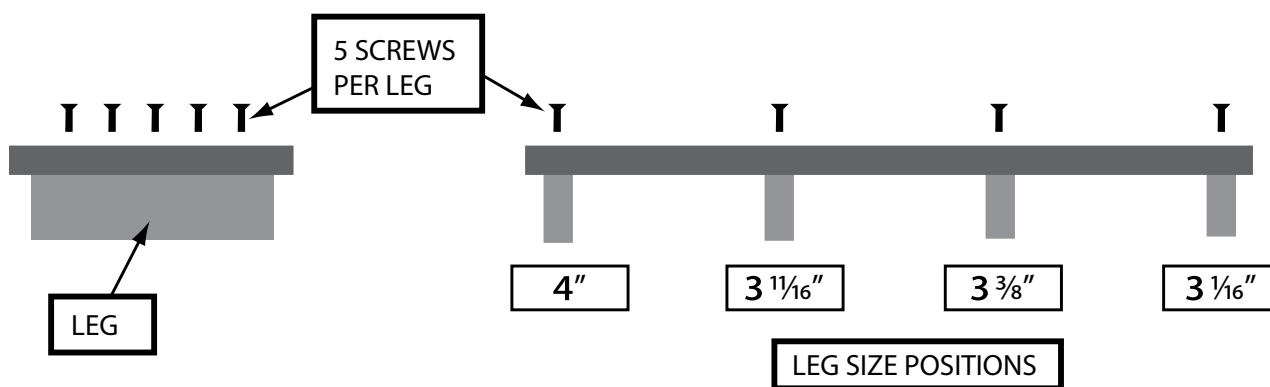

7. YOU MAY WANT TO PAINT THE LEGS AND BOTTOM OF THE BOARD AT THIS TIME WITH SOME LEFT OVER PAINT.

8. GLUING DOWN THE CARPET:


LAY THE CARPET UPSIDE DOWN ON A FLAT SURFACE. LIBERALLY APPLY CARPET ADHESIVE ON TO THE TOP SURFACE OF THE BOARD. TURN THE BOARD UPSIDE DOWN AND CENTER IT ON TO THE BACK SIDE OF THE CARPET.

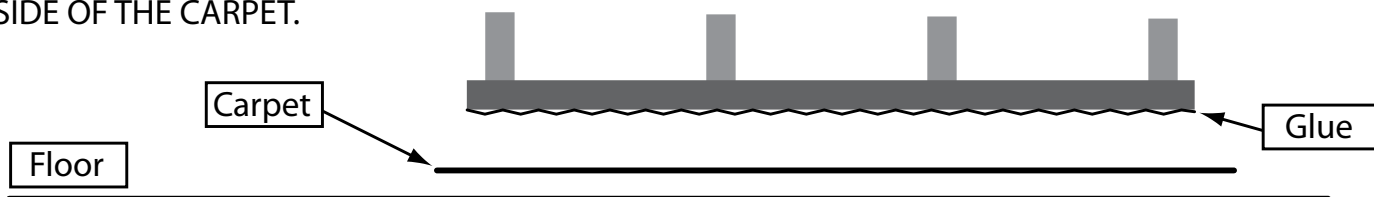

MOVE THE BOARD BACK AND FORTH SLIGHTLY TO ASSURE TRANSFER OF ADHESIVE TO THE CARPET BACKING. LET DRY OVERNITE.


9. MAKING THE HOLES:

FROM THE BOTTOM SIDE OF THE BOARD, MAKE 4 STRAIGHT CUTS IN EACH HOLE FROM EDGE TO EDGE AS SHOWN BELOW. THIS WILL RESULT IN 8 WEDGE SHAPED PIECES. FOLD EACH PIECE TO THE BACK SIDE OF THE BOARD, GLUE AND STAPLE OR TACK TIGHTLY IN PLACE. HAMMER STAPLES DOWN TIGHT.

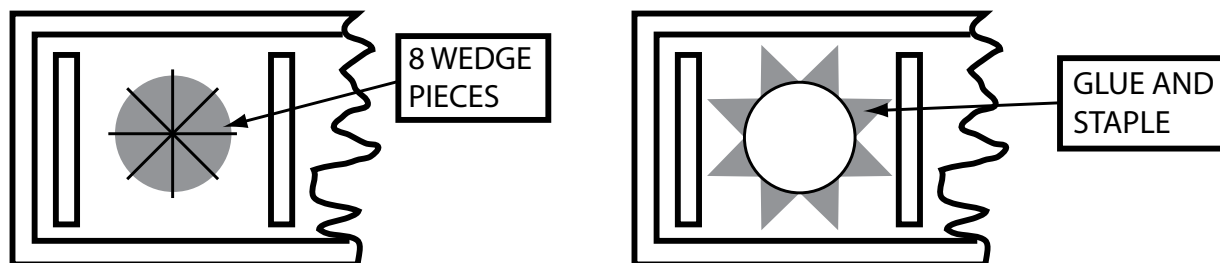


10. FINISH THE EDGES: EITHER TRIM THE CARPET FLUSH TO THE BOARD EDGE, OR FOR A MORE FINISHED APPEARANCE, ROLL THE CARPET UNDER THE FOUR EDGES AND STAPLE OR TACK IN PLACE.

11. ATTACH ROPE (or chain) BETWEEN THE BOARDS' SHORT LEGS TO ALLOW EASY POSITIONING 6 FEET APART. DRILL A HOLE IN THE SHORT LEGS. PASS ROPE THROUGH THE HOLES AND KNOT THE ROPE ON THE BACK SIDE OF THE SHORT LEGS. (I used a chain with hooks in the end legs so the chain can be removed for carrying)

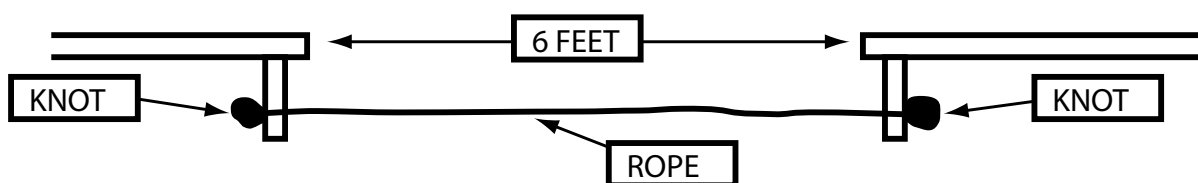

12. PAINT THREE WASHERS ONE COLOR AND THE OTHERS A CONTRASTING COLOR ALSO PAINT THE CLOTHES PINS, ONE EACH COLOR.

13. SCORE STICK: SMOOTH THE STICK'S SURFACE AND PAINT WHITE OR A LIGHT COLOR. WHEN DRY, MARK OFF 21 SPACES, EACH 1 3/4" HIGH. PUT IN NUMBERS 1 THROUGH 21 TOP TO BOTTOM. USE CEMENT OR OTHER HEAVY MATERIAL TO CREATE A BASE. A SMALL COFFEE CAN OR PLASTIC OLEO TUB SHOULD WORK AS A MOLD. BRING FINISHED PRODUCT TO THE NEXT LAZY DAZE CAMPOUT.

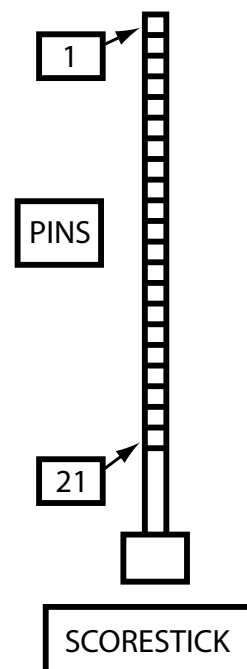

WASHER TOSS GAME MATERIAL:

WOOD:

- 1. 4' X 4' X 3/4" EXTERIOR GRADE PLYWOOD-ONE SIDE GOOD. (WILL MAKE THE BOARDS AND LEGS. AN OPTION TO PLYWOOD LEGS IS TO USE FIR. 1" X 6" X 5' & 1" X 4" X 5' IS REQUIRED.)**
- 2. SCORE STICK ABOUT 1 1/2" OR 2" X 42" LONG. (A PIECE OF LATHING WORKS.)**

HARDWARE:

- 1. 40 EACH 1 3/4" OR 2" SCREWS. (2" SHEETROCK SCREWS WORK VERY WELL AND ARE EASY TO INSTALL.)**
- 2. 6 EACH 1 3/4" PLAIN STEEL FLAT WASHERS. (DUE TO LARGE SIZE THESE MAY BE HARD TO FIND. GALVANIZING OR ANODIZING NOT NEEDED.) WASHER DIMENSIONS ARE VERY CLOSE TO 4" OUTSIDE DIAMETER, 3/16" THICK, WITH A 1 15/16" HOLE.**
- 3. 5/8" CARPET TACKS OR 9/16" STAPLES. (IF YOU HAVE A STAPLER)**

MISCELLANEOUS:

- 1. 2 CLOTHES PINS (SPRING)**
- 2. 2 SPRAY CANS OF PAINT. (CONTRASTING COLORS)**
- 3. 1 BLACK FELT TIP PERMANENT MARKER.**
- 4. SMALL AMOUNT OF CEMENT. (FOR SCORESTICK BASE)**
- 5. CARPET ADHESIVE (HENRY'S WORKS WELL)**
- 6. CARPET, 2 PIECES 20" X 52" EACH. (FLAT LOW PILE CARPET. 3/8" PILE HEIGHT MAX.)**
- 7. ROPE, 1/4" X 8' LONG.**